

Mobile Gate Security



Primarily used for:

- Industrial Facilities, Ports and Construction Sites
- Christmas Bazaars, Concerts and Sporting Events
- Crowd Control, Checkpoints and Mobile Camps




PORTABLE AND REUSABLE SECURITY CONCEPT WITH RAPID INSTALLATION



KEY FEATURES:

- Speed up to 0.28 m/sec
- Opening widths of up to 8 metres
- Requires minimum maintenance
- Ideal security for access route
- Plug & Play

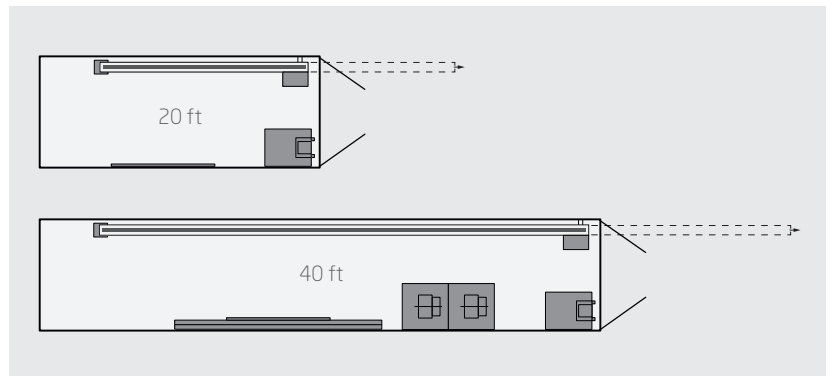

CONTAINER & GATE SPECIFICATIONS

MGS40 =	L: 12.19 x B: 2.44 x H: 2.59
MGS20 =	L: 6.06 x B: 2.44 x H: 2.59
Gate height:	2.20 metres
Clearance under gate:	20 cm
MGS20, weight:	2,950 kg
MGS40, weight:	4,565 kg

ROBUS1000 MOTOR SPECIFICATIONS

Power supply (VAC 50/60 Hz):	230
Power (W):	450
Speed (m/s)	0.28
Force (N):	900
Operating temperature range (°C):	-20C - +50C
Dimensions:	330 x 210 x 303 h
Weight:	13 kg

Both MGS20 and MGS40 have a sliding gate with gate stopper and automatic gate controls. If required the container can also include a mobile fence, a boom system, access control, rotating gate and surveillance cameras.

MGS is available as a 20-foot or 40-foot container with a built-in automated sliding aluminium gate. The motor is built into a cabinet and the solution comes with a flashing light, emergency stop, clamping strips and photo cells.

A gate stopper is included in supply of the container and is made of hot-dip galvanised steel.